



## DROP DECK SEMI-TRAILER



**BUILT STRONGER,  
TO LAST LONGER**

The Strength to weight ratio of Southern Cross Drop Deck Semi-Trailers provides operators with in-service reliability and a trailer manufactured to cope with Australia's harshest conditions.



Custom Accessories



Pull-Out Outriggers

### Construction

- High-tensile steel is used extensively throughout the structure to provide maximum strength.
- The entire frame is sand-blasted and prime coated prior to a superior long lasting finish in your companies fleet colours.
- The comprehensive range of suspensions, axles, landing legs, components and fittings are selected for their proven reliability.




Top Deck Ramps & Stowage



Road Train Coupling





Selection of Ramps Available

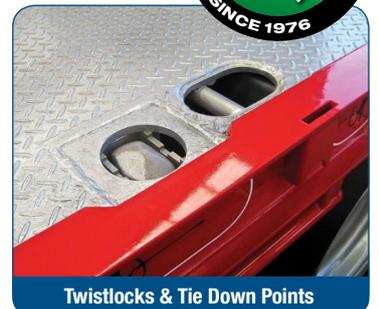

Twistlocks & Tie Down Points

Discuss your requirements with our sales staff today. They will help you gain the best value from your new Southern Cross equipment.

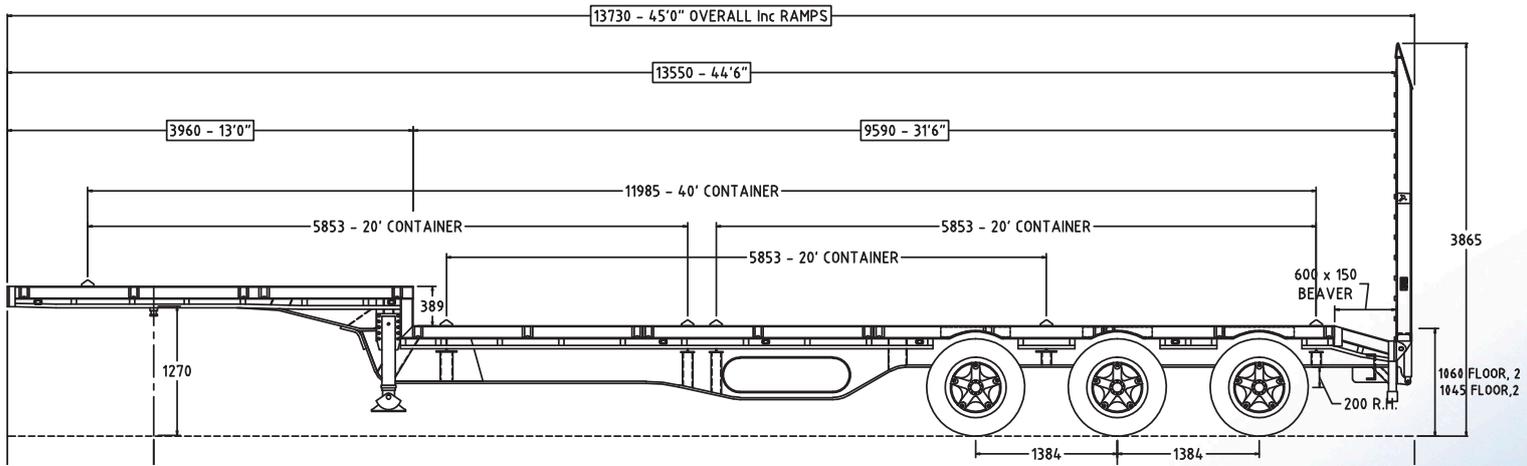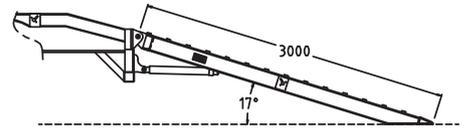

Dimensions	
Length	13730mm (45') standard 14630mm (48') & customised lengths available
Width	2500 mm
Deck height	1060mm on 275/70R x 22.5" tyres - can vary to suit tyre & axle selection.
Construction	
Chassis	Heavy duty - suit road train
Floor	3mm steel chequer plate c/w multiple RHS floor runners - standard
Coaming	5 inch RSJ coamings
Twist Locks	Six (6) rows to suit 1 x 40', 2 x 20' or 1 x 20' laden
Load Racks	Tubular steel fitted front and rear
Winches	Eight (8) sliding winches in track - standard
Tool Box	Two (2) 1200mm toolboxes fitted - standard. Bearer Box fitted to rear of suspension - standard.
Water Tank	60L plastic
Gates	Optional
Ramps	Full selection of ramps available
Road Train	Ringfeder Mount provision c/w Brake & Electrical
Compliance	Road Train, B-Double, B-Triple, OD as required

Running Gear	
Suspension	TMC cast Spring suspension standard. <b>Optional</b> : Airbag – Euro II, BPW, SAF
Brakes	ADR brake kit – Drum brakes standard, <b>Optional</b> : Disc brakes and ABS / EBS as required.
Landing Legs	TMC heavy duty landing legs & compensating feet standard
Axles	<b>Standard</b> : K-Hitch 20" Parallel Bearing axles Spoke or 10 Stud <b>Optional</b> : BPW axles
Wheels/Tyres	Full range available as required
Tyre Carrier	Dual tyre carrier cut through mainrails
Electrical	
Lights	Narva L.E.D with dual 7 pin & 40 amp plugs standard
Paintwork	
Coaming, Hubs & Toolboxes	Painted in high quality Glasurit 2 pac paint to clients specified colour
Underside	Hammertone silver standard, 2 pac optional
Warranty	
12 months	



SCTEG reserves the right to change specification information without notice, and accepts no liability, either direct or indirect for any loss that may result from the application of this information. Photographs may show equipment that is available at extra cost.



**S.A / NSW / NT**  
9-15 Manthorpe Street,  
Dry Creek, SA, 5094  
T (08) 8405 7600  
E sales@trailers.scteg.com.au

**VIC / TAS / ACT**  
27-31 Thomas Murrell Cres,  
Dandenong South, VIC, 3175  
T (03) 9706 6080  
E sales@vans.scteg.com.au

**W.A**  
10 Eva Street,  
Maddington WA, 6109  
T 0419 242 911  
E aaron@trailers.scteg.com.au

**QLD**  
182 Tile Street,  
Wacol, Queensland, 4076  
T 0428 125 722  
E gregh@scteg.com.au